


SPINDRIFT 5 AL


Exploded Drawing - Spare Parts - Standards

LEVERAGE RATIO

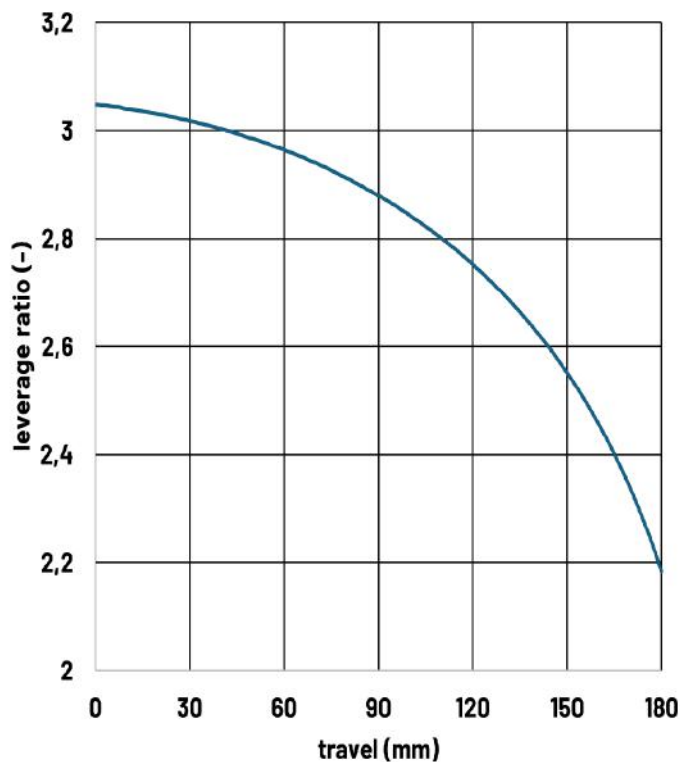

Standards

Max. fork length	606 mm
Shock length	230 mm
Shock stroke	65 mm
Shock mount top	Ø 8 x 20 mm
Shock mount bottom	Ø 8 x 30 mm
Rear wheel travel	180 mm
Brake mount	Post mount 180
Bottom Bracket	BSA 73 mm
Seat post diameter	31.6 mm
Seat clamp diameter	34.9 mm
Head set (S.H.I.S)	Top: ZS49 / Bottom: ZS56
Rear wheel axle	X12 (148mm-Boost)
Rear hub width	148 mm (Boost)
Chain line	52 mm (Boost)
Chain guide mount	ISCG 05 (Boost)
Tire sizes	27.5" / Mix / 29"

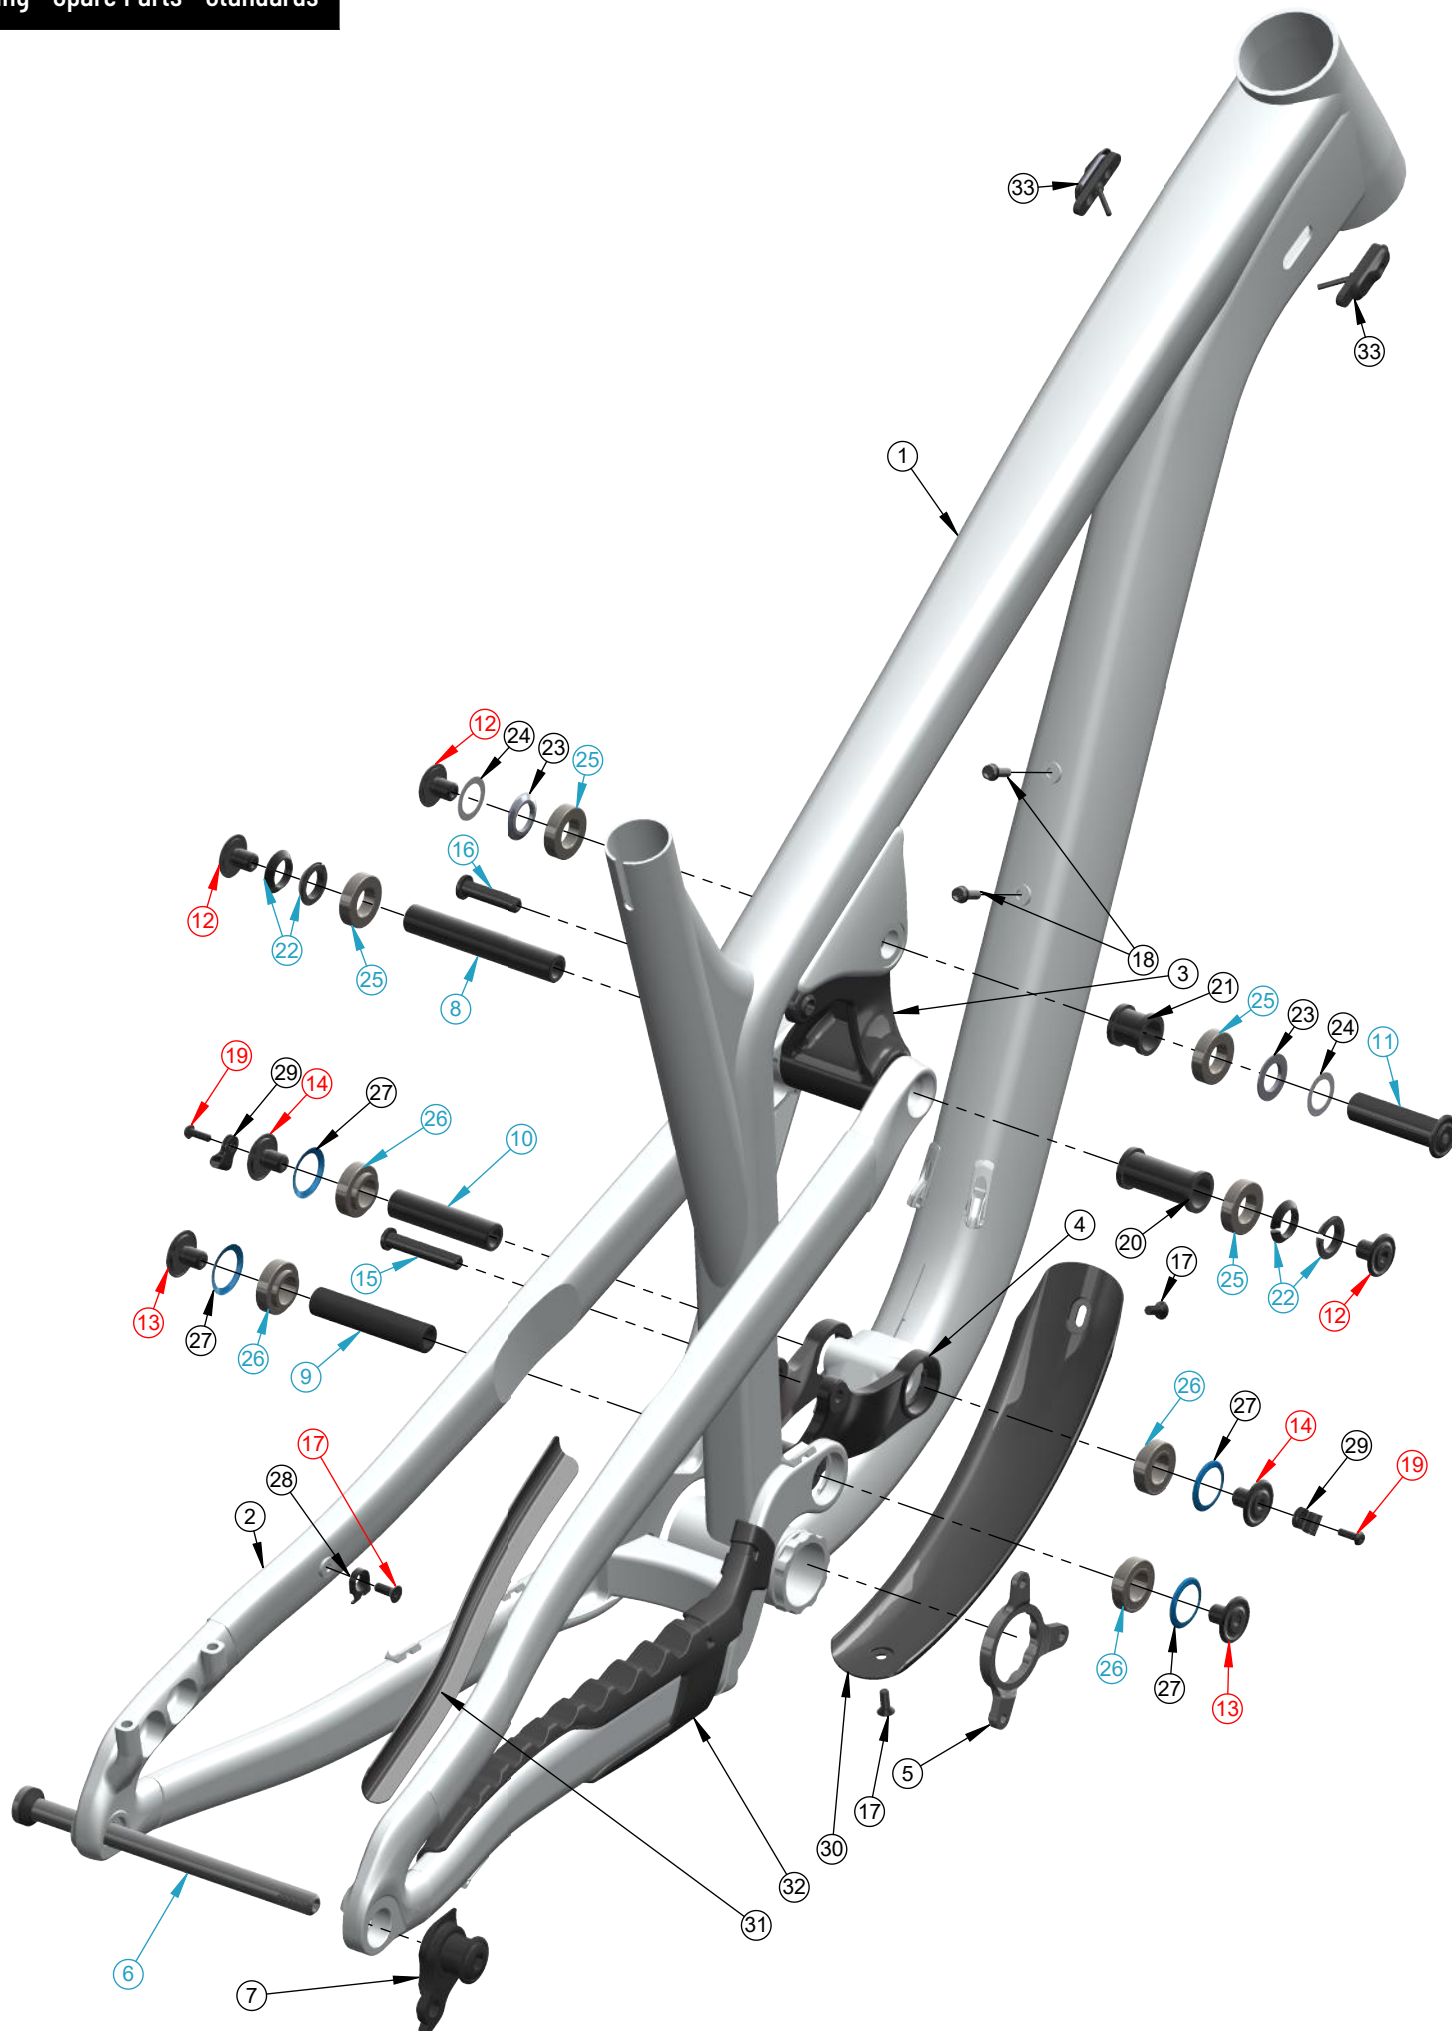

Item No.	Part. No.	Part name	Qty.	Torque
1	001265	Front triangle Spindrift	1	
2	001176	Rear triangle Spindrift	1	
3	001288	Upper link	1	
4	001044	Lower link	1	
5	001076	ISCG_05_removable_boost148	1	
6	001284	Propain_Sixpack_X12_axle_UDH	1	12 Nm
7	001739	UDH hanger	1	20 Nm
8	001066	Axle_15x92xM10_clamp_type	1	
9	001115	Axle_15x69.5mmxM10x1	1	
10	000616	Axle_15x62mmxM10x1	1	
11	001299	15mm_Axle_Top_Pivot	1	
12	000605	15mm_clamp_Axle_Cap	3	15 Nm
13	000600	15mm_Axle_Cap	2	15 Nm
14	001714	Bolt_M10x1x12_custom	2	15 Nm
15	000991	Bolt_M8x43_custom	1	15 Nm
16	001287	Bolt_M8x33.5_custom	1	15 Nm
17	000056	Bolt_M5x12-IS010642	3	3 Nm
18	000979	Bolt_M5x15_custom	2	3 Nm
19	001715	Bolt_M4x12-IS07380-1	2	2,5 Nm
20	001296	barril 45.5x16	1	
21	001295	barril 20x16	1	
22	000604	Clamp_ring_15mm_axle	4	
23	001204	washer 15x2.5	2	
24	001293	spacer 15x0.25	2	
25	000006	Bearing_15x28x7-S61902-2RS	4	
26	000176	Bearing_15x28x7_flange_61902	4	
27	000602	Dust_cap_seal	4	
28	000057	Cable_guide_1	1	
29	001713	Action cable base	2	
30	001314	DT_protector	1	
31	001188	SS_protector	1	
32	002232	CS_protector	1	
33	002342	Cable_guide	2	

Apply grease

Use Loctite 243 on thread

PROPAIN