



LEVERAGE RATIO

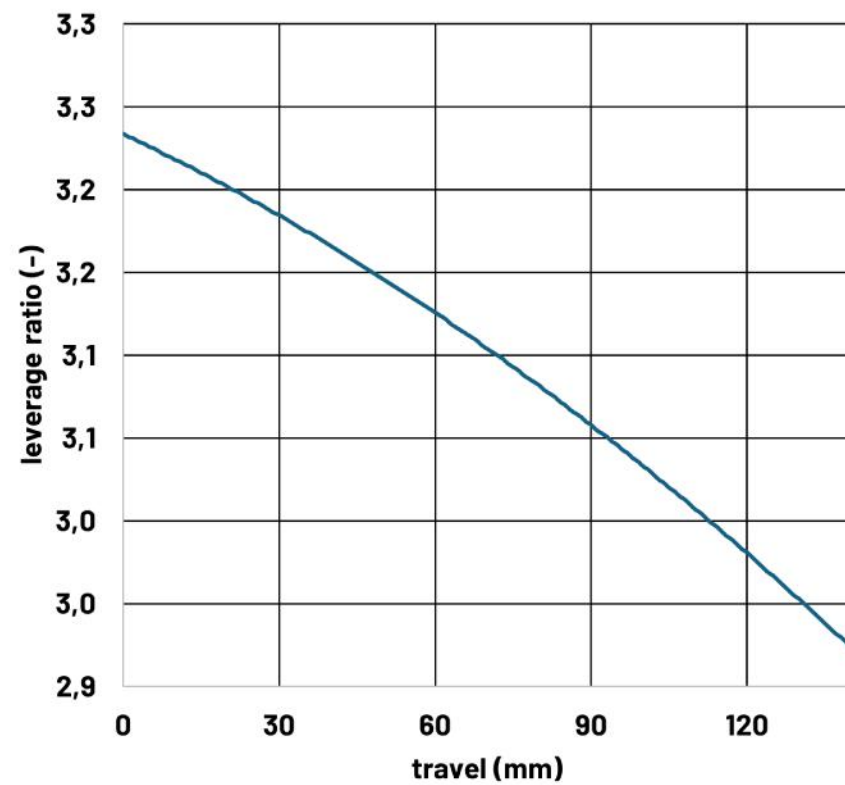

Standards

BB standard	BSA 73 mm
Max. AC length	26": 520 mm 24": 500 mm
Shock length	165 mm
Shock stroke	26": 45 mm 24": 42.5 mm
Shock mount top	Trunnion
Shock mount bottom	8x25 mm
Rear wheel travel	26": 140 mm 24": 130 mm
Brake mount	Post mount 180 mm
Seat post diameter	31.6 mm
Seat clamp diameter	34.9 mm
Head set (S.H.I.S)	Top: IS42 / Bottom: IS52
Rear wheel axle	x12 (148mm-Boost)
Rear hub width	148 mm (Boost)
Chain line	52 mm (Boost)
Chain guide mount	ISCG 05 (Boost)
Max. tire size front	26"x2.4 24"x2.4
Max. tire size rear	26"x2.4 24"x2.4

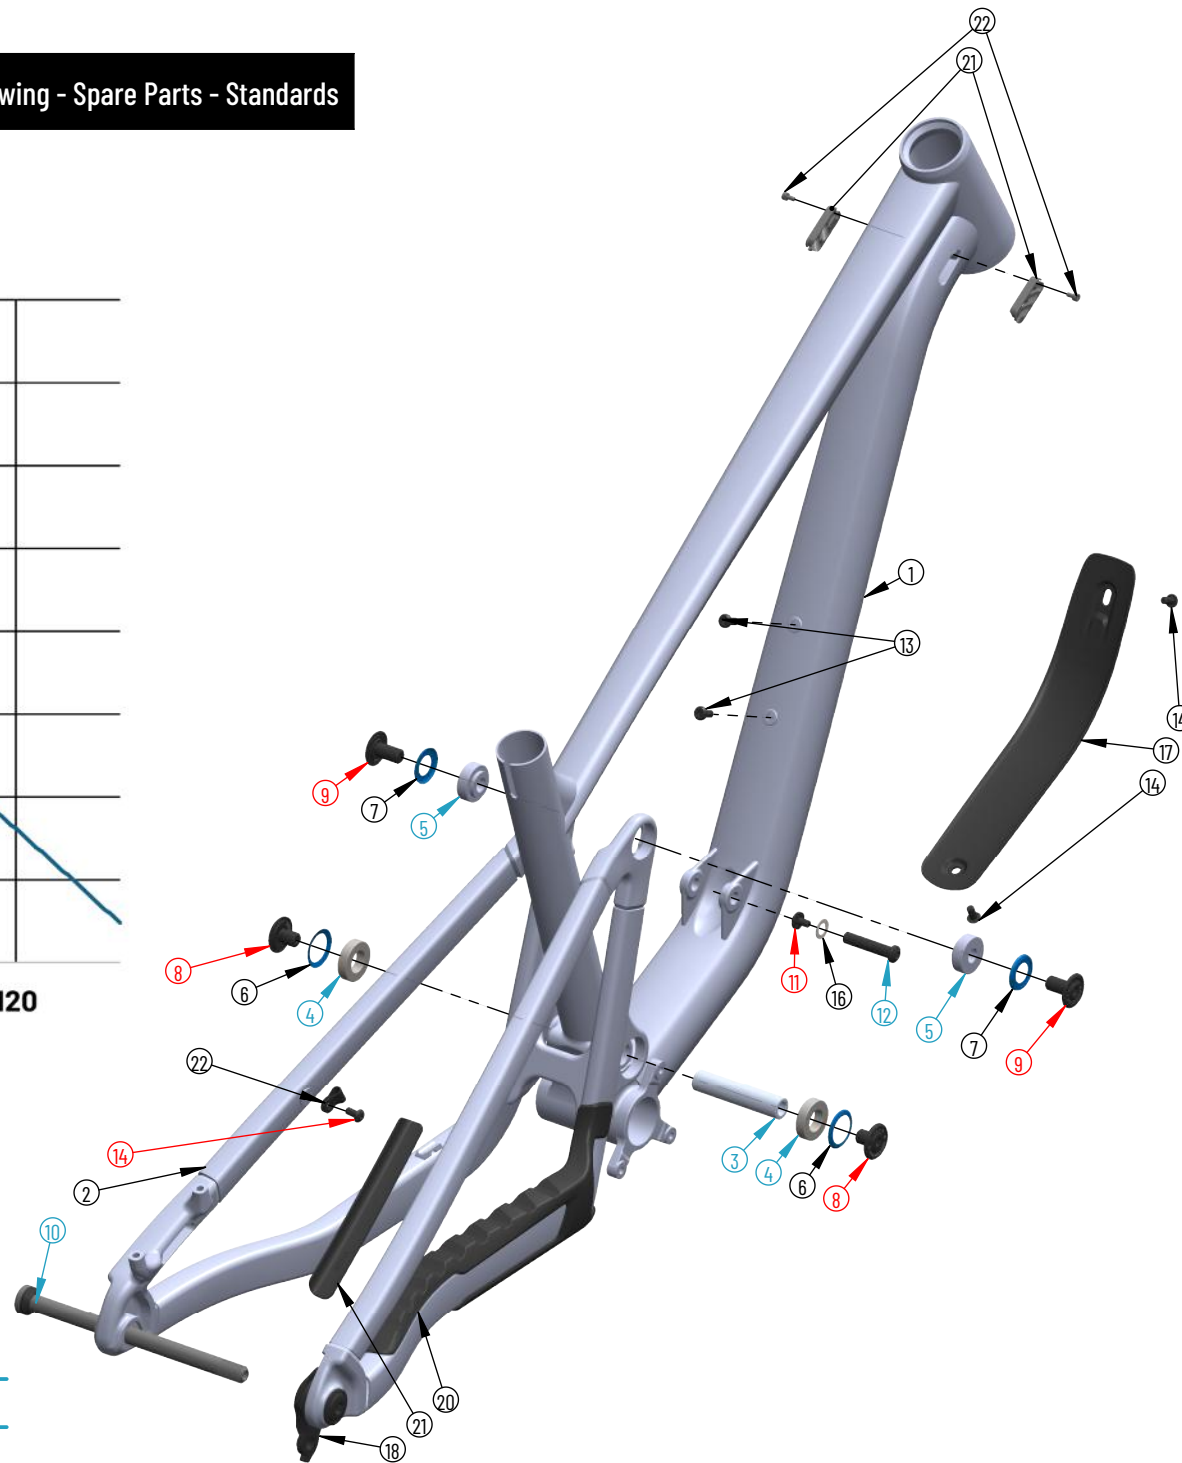

 Add Loctite 243 on thread

 Add Grease

Item No.	Part No.	Part name	Qty.	Torque
1	002466	Front_triangle	1	
2	002477	Rear_triangle	1	
3	000659	Axle_15x69xM10x1	1	
4	000006	Bearing_15x28x7_61902-2RS	2	
5	002711	Bearing_10x26x8_flange	2	
6	000602	Dust_cap_seal_x27	2	
7	001385	Dust_cap_seal	2	
8	000600	15mm_Axle_Cap	2	15 Nm
9	001346	Bolt_M10x1x18custom	2	15 Nm
10	001284	Propain_Sixpack_X12_axle_UDH	1	12 Nm
11	002487	Bolt_M5x8custom	1	6 Nm
12	002486	Bolt_8x38,5custom	1	6 Nm
13	002317	Bolt_M5x12custom	2	6 Nm
14	000055	Bolt_M5x10_roundhead	3	6 Nm
16	001736	Washer 8x14x0.5 DIN988	1	
17	002488	DT_protector	1	
18	001739	UDH hanger	1	20 Nm
20	002492	CS_protector	1	
21	002514	SS_protector	1	
22	001713	Action cable base	1	
21	002688	Cable_guide	2	
22	002689	Bolt_M3x6_IS0912	2	2 Nm